

KTT45


ExpressDry Stack Drying Tumbler

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS


ExpressDry

PRODUCT SPECS	
Capacity <i>lbs</i>	2 x 45
Cylinder Diameter <i>inch</i>	33
Cylinder Depth <i>inch</i>	30
Cylinder Volume <i>cu ft</i>	14.8
Net Weight <i>lbs</i>	673
Crated Weight <i>lbs</i>	718
Machine Width <i>inch</i>	34.5
Machine Depth <i>inch</i>	48.62
Machine Height <i>inch</i>	81.25
Door Openings <i>inch</i>	26.55
Floor to Door <i>inch</i>	49.3 (top)
Shipping Dimensions <i>inch</i> WxDxH	35.5 x 54 x 85
Exhaust Diameter <i>inch</i>	10
Exhaust Air Flow <i>cfm</i>	600 per pocket
Exhaust Back Pressure (max) <i>WCI</i>	0.90 both pockets
Required Makeup Air <i>sq in</i>	288 both pockets
Gas Connection <i>inch</i>	1/2 NPT
Gas Heating <i>BTU/h</i>	95,000
Gas Pressure (max/recommended/min)	
Natural Gas <i>wc</i>	10.5 / 6.5 / 5
Propane <i>wc</i>	13 / 11 / 10


GAS MODELS			
AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
200-240/50-60/1	2W+G	12	15
380-415/50-60/3	3W+G	6	15
440-480/50-60/3	3W+G	6	15

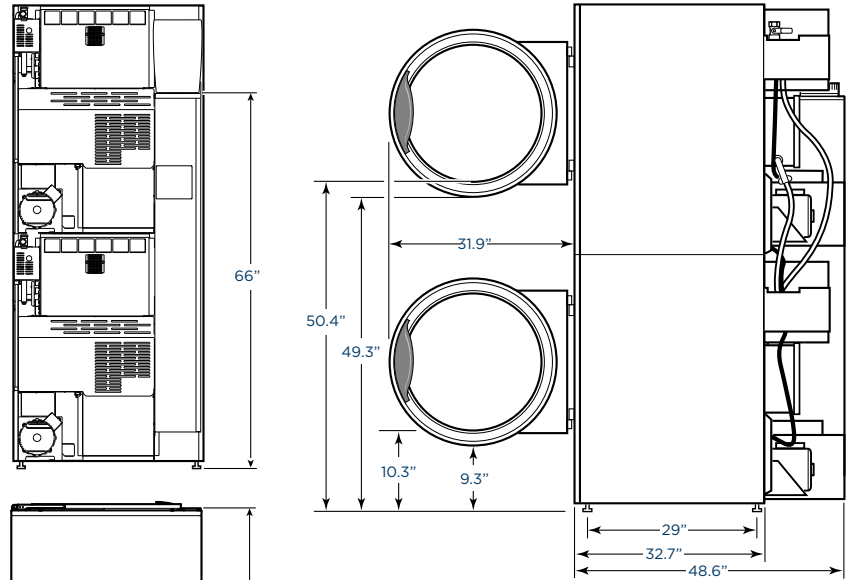


SIDE VIEW



Exhaust Outlet Locations -
All Heating Types




TOP VIEW - Gas

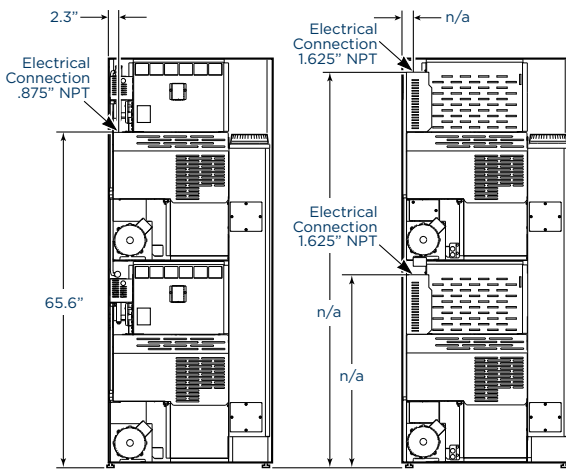


Electrical Connections
- Gas Models

Electrical Connections
- Electric Models

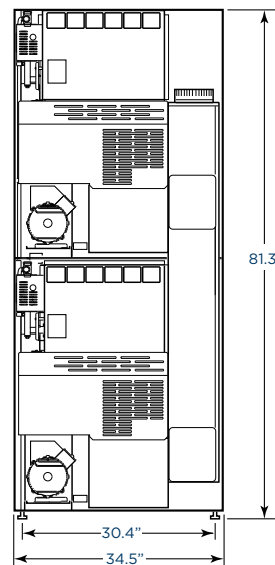

BACK VIEW

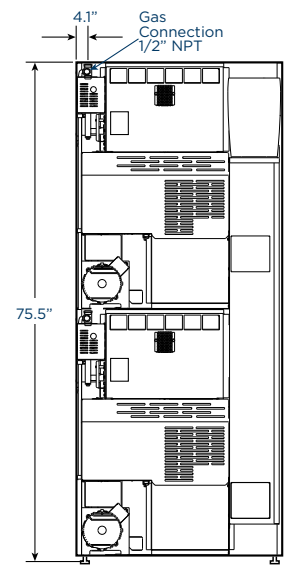

BACK VIEW - Gas

* Specifications subject to change without notice or obligation.
Contact Continental Girbau at (800) 256-1073 for dimensions
not shown or for clarification.